

IRIN 29 K


Ref. TINVPLASMA29K

Power supply	230Vac ± 15%
Frequency	50/60 Hz
Input supply (35% - 100%)	25 A - 13 A
Maximum input power	3,3 KVA
No load voltage	460 V
Cutting current 35% / 100%	25 A / 13 A
Recommended cutting capacity	6 mm
Maximum cutting capacity	8 mm
Brute cutting capacity	10 mm
Level protection	IP 23 S
Insulation class	H/F
Dimensions (mm.)	190 x 430 x 420
Weight	16 Kg



TORCH TM-25C

Ref. PP09627/TM

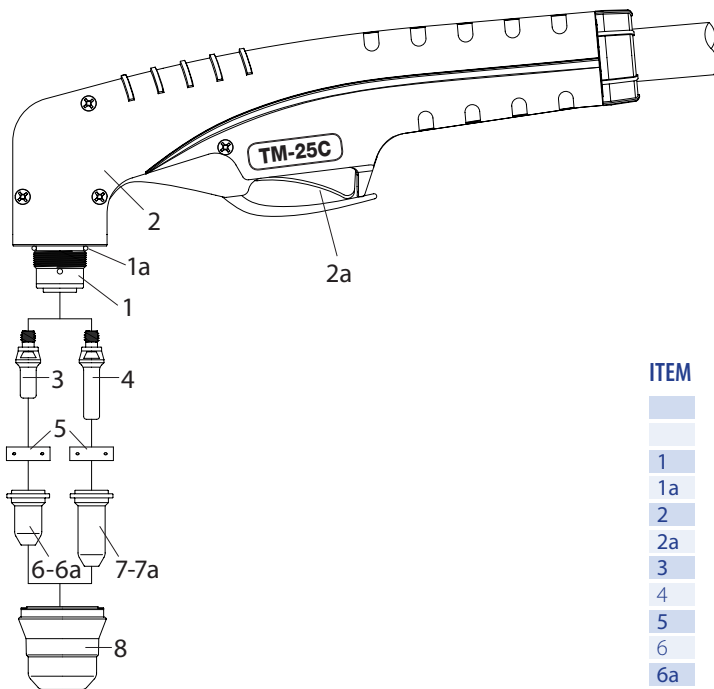

Pilot arc: Electrode against tip cutting
 Gas pressure: 40 psi (2,8 bar)
 Gas flow: 85 scfh (40 lpm)
 Duty cycle: 25 Amp 60%
 Ignition: Without HF
 Current: 10-25 Amp.
 Gas: Air

ITEM	CODE	DESCRIPTION
	PP09627/TM	70° Hand coaxial torch, 4 m (12,5 ft) length
	PP09682/TM	Coaxial lead assembly, 4 m (12,5 ft) length
1	PP09601*	PT-25C 70° torch head
1a	PP51620.60*	O-ring
2	PP09605*	Handle with switch
2a	PP07301.20*	Switch
3	PP52582*	Electrode, back striking
4	PP52583	Extended electrode, back striking
5	PP60028*	Gas distributor
6	PP51318.06	Tip, contact cutting, Ø 0,65 (10-20 A)
6a	PP51318.08*	Tip, contact cutting, Ø 0,80 (20-30 A)
7	PP51318L.06	Extended tip, contact cutting, Ø 0,65 (10-20 A)
7a	PP51318L.08	Extended tip, contact cutting, Ø 0,80 (20-30 A)
8	PP60389K*	Retaining cap, 2 holes

* Accessories included with the torch